

Wherever There is Pro AVL . . . There is LynTec

Every power control panel LynTec has ever made is reliable, protective and brilliantly simplistic. Switching at the circuit level is our legacy. While our heritage is in venues like Madison Square Garden, the Austin City Limits Stage at the Moody Theater and the like, our future is everywhere there is amplified sound, performance lighting and distributed video to control.

AVL RELAY PANELS

Add circuit control to any existing breaker panel. Simply mount a relay panel next to your circuit breaker panel and control AC power "hot" lines, and daisy chain them for unlimited circuit count.

Power Control Simplified

A smart investment

- Latching relays mean there is no continuous relay coil current
- Runs cool for long life
- Automatic load shedding and brownout protection
- Built-in emergency override function

Electrician friendly



- Reliable G-E RR7P3 latching relays snap in and have low voltage plug-in connectors
- Diagnostic LEDs and internal ON - OFF test switches speed installation for testing and troubleshooting
- ETL listed

Three Control Options

PDS series adds ONE-TOUCH sequential on/off control

LCRP series adds DMX512 individual circuit control

SCRP series adds RS-232 individual circuit control

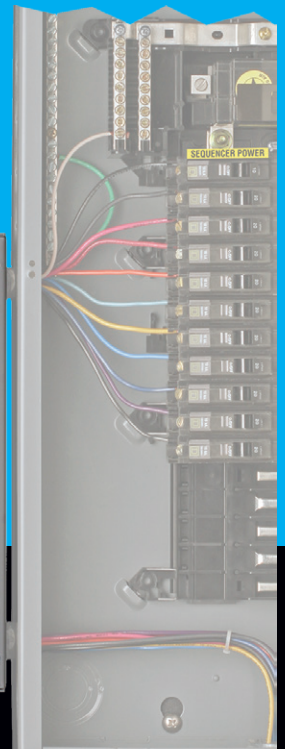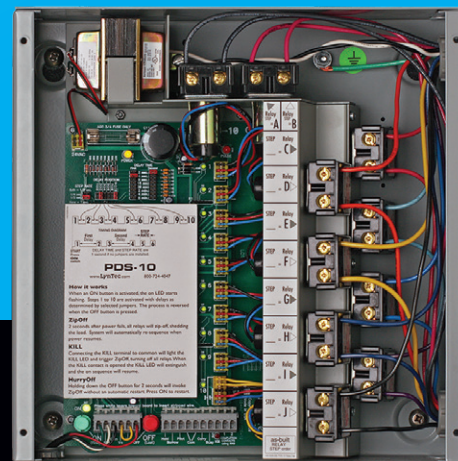

LynTec

LynTec.com | 800.724.4047

Power Control Simplified

AVL RELAY PANELS

Available Models

All relay panels are available in 4, 8, 10 circuit models and 120, 240 or 277 volts.

SEQUENCING

PDS-10-4

PDS-10-8

PDS-10

DMX512

LCRP-4

LCRP-8


LCRP-10

RS-232

SCRP-4

SCRP-8

SCRP-10

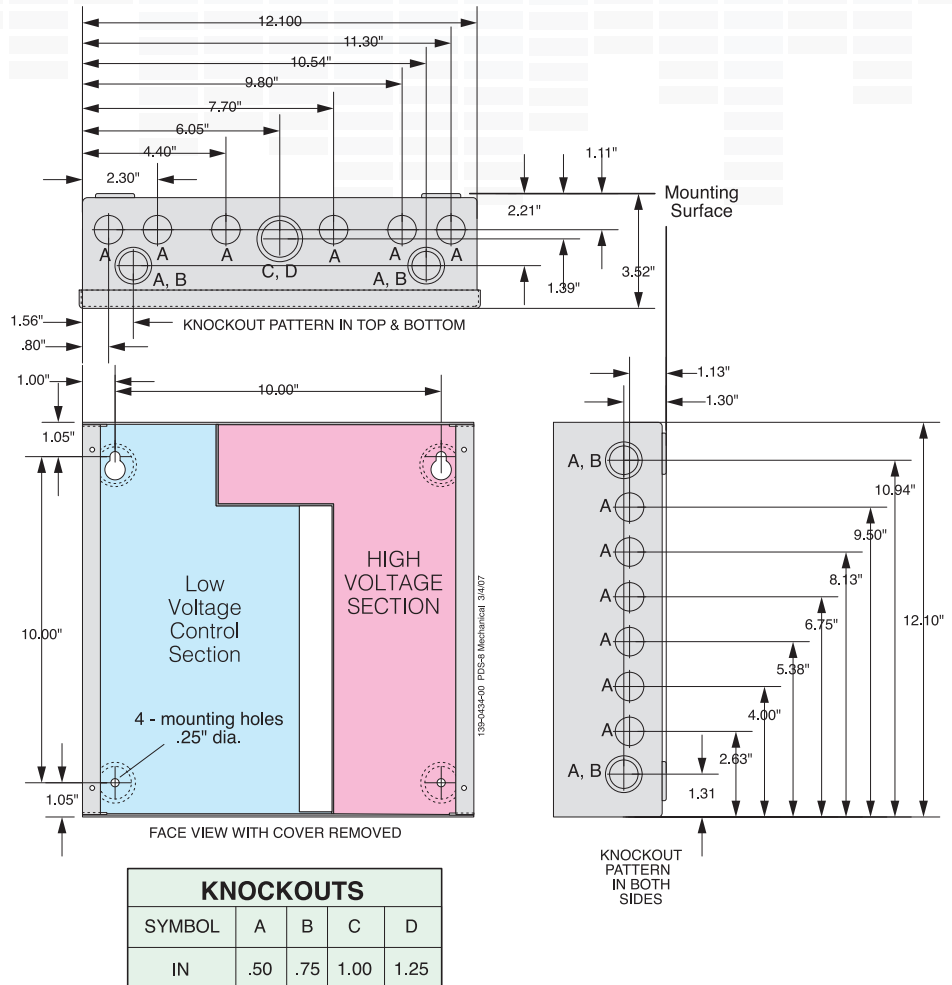

G-E RR7P3 Latching Relay

G-E RR7 and RR9 Relay Ratings

Power Contacts: Latching

20A Tungsten, 125VAC 1/2HP motor at 110-125VAC

30A Ballast, 277VAC 1 1/2 HP motor at 277VAC

30A Resistive, 277VAC

20A Ballast, 347VAC 1 1/2 HP motor at 220-277VAC

20A Resistive, 347VAC



FOR COPPER WIRE ONLY

This product is NEC 110 Compliant when used in accordance with the following: Suitable for Use on a Circuit Capable of Delivering Not More Than 10 kA Sym. Amps., 277 Volts Maximum. UL Listed 508G Industrial Control Equipment — CSA certified

Low voltage characteristics — RR7P3 P3 suffix denotes a 3-pin, .156" AMP or Molex connector attached. RR9P has a 5-pin connector.

Actuating coils: 21-30 Vac (class 2). Momentary, OFF (1-black), ON (2-red), Common (3-Blue) 55-60 Ohms DCR, each coil.

LynTec

LynTec.com | 800.724.4047