


## Feature Matrix

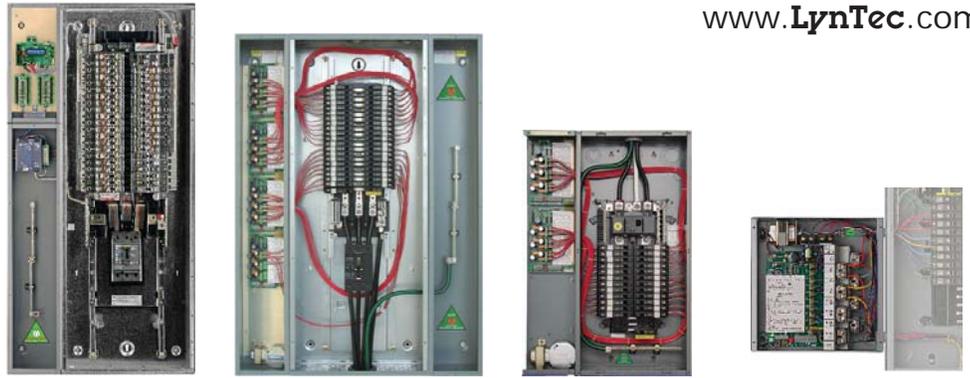

	RPC	QO Panelboards	QO Load Centers	Relay Cabinets
<b>Key Features</b>				
Emergency Override	X	X	X	X
Brownout Protection	X	X	X	X
Load Shedding	X	X	X	X
Daisy-Chaining	X	X	X	X
Single Cabinet Solution	X	X	X	-
Networkable	X	-	-	-
Zone Control	X	-	-	-
Web-Enabled	X	-	-	-
Web Browser Setup	X	-	-	-
Load Monitoring	Optional	Optional	Optional	-
<b>Control Options</b>				
Sequencing	X	MSP	MSLC	PDS
DMX control	X	LCP	LCLC	LCRP
RS-232 control	X	SCP	SCLC	SCRIP
Web Browser	X	-	-	-
TCP/IP	X	-	-	-
<b>Electrical Options</b>				
Motorized breakers	10, 20, 30A; 1, 2, 3 poles	10, 20, 30A; 1, 2, 3 poles	10, 20, 30A; 1, 2, 3 poles	-
Bolt-on Breakers	X	X	-	-
Snap-in breakers	-	X	X	-
200% Neutrals	X	X	-	-
Isolated Technical Ground	X	X	X	-
Dedicated ITG Sidecar	X	X	-	-
System ETL Listed	X	X	X	X
Commercial Grade Enclosure	X	X	-	X
Single or Three Phase	X	X	X	-
240v operation	X	-	-	Optional
277v operation	Optional	-	-	Optional
Relays	-	-	-	20A
Retrofit Option Available	-	X	X	X